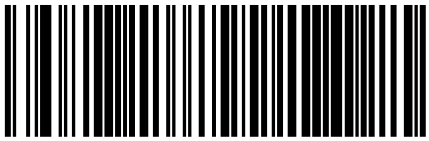


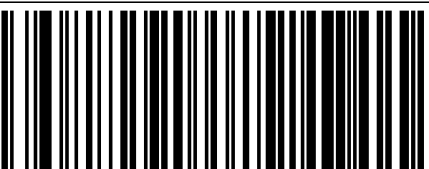
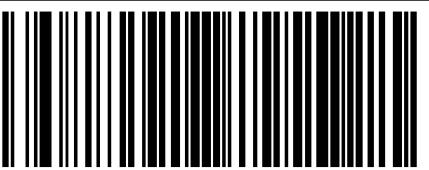
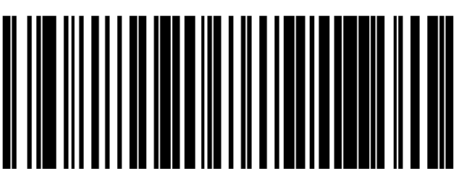
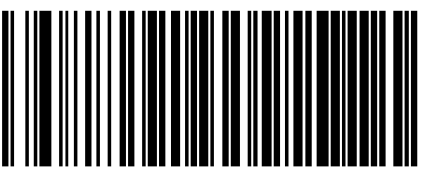




Configurazione Datalogic Heron HD3130 – QD2100 - TD1100

per ITAL Mech – ITAL Touch – ITAL Printer

1	 Restore Custom Default Configuration
2	 Select RS232-STD
3	 Enter/Exit Programming Mode
4	 Baud Rate = 9600
5	 Parity = None
6	 8 Data Bits
7	 1 Stop Bit

8	 Handshaking Control = RTS/XON/XOFF
9	 Label ID Transmission = Disable
10	 Set Global Suffix
11	 0
12	 D
13	 Enter/Exit Programming Mode
14	 Enter/Exit Programming Mode



ECR connettore RJ45	connettore DB9 M per cavo scanner CAB-350 + alim. PG5-05P55
6	2
7	3
4	5