



# Configurazione Datalogic Magellan 1100i, 800i per ITAL MECH, TOUCH, PRINTER

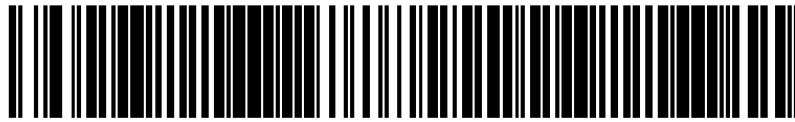

Standard Product Default Settings

1		8	 Flow control: Software (XON-XOFF)
2	 Start configuration	9	 Label ID: disable
3	 RS232 Standard	10	 Set suffix
4	 Baud: 9600	11	 0
5	 Parity: None	12	 D
6	 Data bits: 8	13	 End suffix
7	 Stop bits: 1	14	 Exit configuration



ECR connettore RJ45	connettore DB9 M per cavo scanner 8-0736-80 + alim. 11-0388
6	2
7	3
4	5